
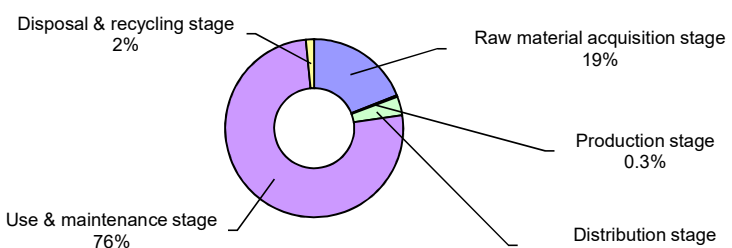


# Registration Information Carbon Footprint of Products (CFP)



1. Product information			
1.1	Registration number	CR-DG02-19035-A	<div style="display: flex; justify-content: space-between;"> <span>1.7 Product photo</span>  </div>
1.2	Registration name	Xerox PrimeLink C9070 Printer	
1.3	Model name / number	Xerox PrimeLink C9070 Printer	
1.4	Main specifications of product	Print speed (Color/Mono): 70ppm/75ppm (Letter) Maximum Paper size: SRA3(320.0×450.0mm) Capable of print/copy/scan, duplex printing. Product Size: 1574.0(W)×804.0(D)×1392.0(H) (mm) Product weight: 237kg	
1.5	CFP quantification unit	Per unit product	
1.6	CFP release date	October 1st, 2019	

2. Company Information		
2.1	Company name (in English)	FUJIFILM Business Innovation Corp.
2.2	Phone number (incl. area code)	+81-3-6271-5111

3. CFP quantification results, and description of CFP declaration																					
3.1	CFP quantification results	<b>7,400</b>	kg-CO <sub>2</sub> e																		
3.2	Breakdown (by life cycle stage, by process, by flow, etc.)																				
	Raw material acquisition stage	1,400	kg-CO <sub>2</sub> e																		
	Production stage	22	kg-CO <sub>2</sub> e																		
	Distribution stage	250	kg-CO <sub>2</sub> e																		
	Use & maintenance stage	5,600	kg-CO <sub>2</sub> e																		
	Disposal & recycling stage	110	kg-CO <sub>2</sub> e																		
Value in CFP mark and description of additional info.																					
	Value in CFP mark	<Numerical value>	<Unit for the value>																		
		<b>7,400kg</b>	per unit product																		
3.3	Description of additional info.	<p>*Calculated by the standard Scenario for MFP (EP type).            *Calculated on the basic configuration.            *CO<sub>2</sub> emission in the distribution stage assumes the United States as the main sales area.            *Electric power in the use and maintenance stage is evaluated with the public electric-power-consumption-rate in the United States.            *Print volume is assumed 3,375,000 sheets.            *In this scenario, the CO<sub>2</sub> emissions from copy papers are estimated 26,000 kg-CO<sub>2</sub>e at 4.0g per A4 paper.            *The CO<sub>2</sub> emission of printing paper is excluded from the use and maintenance stage.            *Electric power in the use stage is evaluated based on TEC value which is measured in accordance with International ENERGY STAR Program version 3.0.</p> <div style="text-align: center;">  <table border="1" style="margin: 10px auto;"> <caption>CFP Breakdown by Stage</caption> <thead> <tr> <th>Stage</th> <th>Value (kg-CO<sub>2</sub>e)</th> <th>Percentage</th> </tr> </thead> <tbody> <tr> <td>Use &amp; maintenance stage</td> <td>5,600</td> <td>76%</td> </tr> <tr> <td>Raw material acquisition stage</td> <td>1,400</td> <td>19%</td> </tr> <tr> <td>Distribution stage</td> <td>250</td> <td>3%</td> </tr> <tr> <td>Disposal &amp; recycling stage</td> <td>110</td> <td>2%</td> </tr> <tr> <td>Production stage</td> <td>22</td> <td>0.3%</td> </tr> </tbody> </table> </div>		Stage	Value (kg-CO <sub>2</sub> e)	Percentage	Use & maintenance stage	5,600	76%	Raw material acquisition stage	1,400	19%	Distribution stage	250	3%	Disposal & recycling stage	110	2%	Production stage	22	0.3%
Stage	Value (kg-CO <sub>2</sub> e)	Percentage																			
Use & maintenance stage	5,600	76%																			
Raw material acquisition stage	1,400	19%																			
Distribution stage	250	3%																			
Disposal & recycling stage	110	2%																			
Production stage	22	0.3%																			
3.4	Remarks																				

4. Interpretation of CFP quantification results		
4.1	Interpretation of CFP quantification results	<p>CO2 emission in use and maintenance stage is the largest as 76%. It is important to save energy during product usage.</p> <p>The use condition in this scenario can be different from the use condition of the user.</p> <p>A choice of the use condition (print mode, print conditions and so on) can reduce the CO2 emission during product usage.</p> <p>For example, 1,400kg-CO2e of the CO2 emissions (approximately 19%) can be reduced if 2-in-1 print is applied to 1,687,500 sheets (50% of the estimated total print volume).</p> <p>Primary data is used in the raw material consumption. Secondary data is used in the parts manufacturing process which might not be reflected our own circumstances because it is difficult to collect the data for thousands of the parts. Please understand this result as the rough estimate according to the reason mentioned above.</p>

5. Conditions of quantification					
5.1	Name of approved CFP-PCR	Imaging input and/or output equipment	5.2	Approved CFP-PCR ID	PA-DG-02
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data (domestic country v.1.04、foreign country v.1.0) is used if the items don't correspond to basic data v.1.01.			

6. Verification information					
6.1	Verification method	CFP system certification	6.2	CFP system certification No.	SCN16001
6.3	Verification ID	FX-2019-007	6.4	Completion date of verification	September 26th, 2019

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	<a href="http://www.cfp-japan.jp/">http://www.cfp-japan.jp/</a>
7.3	Program operator	Japan Environmental Management Association for Industry (JEMAI)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	Revised on April 1st, 2021: Implemented the company name change.
---	---------	--

For secondary data, please refer to the information on the following CFP website.  
<http://www.cfp-japan.jp/calculate/verify/data.html>