
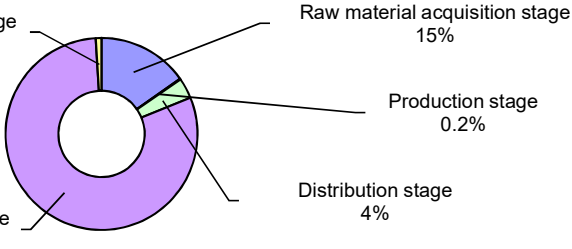


Registration Information Carbon Footprint of Products (CFP)



1. Product information			
1.1	Registration number	CR-DG02-20013-A	<div style="text-align: center;">1.7 Product photo</div> 
1.2	Registration name	Xerox PrimeLink B9125 Copier/Printer	
1.3	Model name / number	Xerox PrimeLink B9125 Copier/Printer	
1.4	Main specifications of product	Print speed (Mono): 125ppm (Letter) Maximum Paper size: 330mmx488mm Capable of print/copy/scan, duplex printing. Product Size: 2,339(W)x913(D)x1,477(H) (mm) Product weight: 392kg	
1.5	CFP quantification unit	Per unit product	
1.6	CFP release date	February 17th, 2020	

2. Company Information		
2.1	Company name (in English)	FUJIFILM Business Innovation Corp.
2.2	Phone number (incl. area code)	+81-3-6271-5111

3. CFP quantification results, and description of CFP declaration																					
3.1	CFP quantification results	13,000	kg-CO ₂ e																		
Breakdown (by life cycle stage, by process, by flow, etc.)																					
3.2	Raw material acquisition stage	1,900	kg-CO ₂ e																		
	Production stage	18	kg-CO ₂ e																		
	Distribution stage	430	kg-CO ₂ e																		
	Use & maintenance stage	10,000	kg-CO ₂ e																		
	Disposal & recycling stage	120	kg-CO ₂ e																		
Value in CFP mark and description of additional info.																					
Value in CFP mark		<Numerical value> 13,000kg	<Unit for the value> per unit product																		
3.3	Description of additional info.	<p> *Calculated by the standard Scenario for MFP (EP type). *Calculated on the basic configuration. *CO₂ emission in the distribution stage assumes the United States as the main sales area. *Electric power in the use and maintenance stage is evaluated with the public electric-power-consumption-rate in the United States. *Print volume is assumed 9,370,000 sheets. *In this scenario, the CO₂ emissions from copy papers are estimated 72,000 kg-CO₂e at 4.0g per A4 paper. *The CO₂ emission of printing paper is excluded from the use and maintenance stage. *Electric power in the use stage is evaluated based on TEC value which is measured in accordance with International ENERGY STAR Program version 3.0. </p> <div style="text-align: center;">  <table border="1" style="margin: 10px auto;"> <caption>CFP Breakdown by Life Cycle Stage</caption> <thead> <tr> <th>Life Cycle Stage</th> <th>CO₂ Emission (kg-CO₂e)</th> <th>Percentage</th> </tr> </thead> <tbody> <tr> <td>Use & maintenance stage</td> <td>10,000</td> <td>80%</td> </tr> <tr> <td>Raw material acquisition stage</td> <td>1,900</td> <td>15%</td> </tr> <tr> <td>Distribution stage</td> <td>430</td> <td>4%</td> </tr> <tr> <td>Production stage</td> <td>18</td> <td>0.2%</td> </tr> <tr> <td>Disposal & recycling stage</td> <td>120</td> <td>1%</td> </tr> </tbody> </table> </div>		Life Cycle Stage	CO ₂ Emission (kg-CO ₂ e)	Percentage	Use & maintenance stage	10,000	80%	Raw material acquisition stage	1,900	15%	Distribution stage	430	4%	Production stage	18	0.2%	Disposal & recycling stage	120	1%
Life Cycle Stage	CO ₂ Emission (kg-CO ₂ e)	Percentage																			
Use & maintenance stage	10,000	80%																			
Raw material acquisition stage	1,900	15%																			
Distribution stage	430	4%																			
Production stage	18	0.2%																			
Disposal & recycling stage	120	1%																			
3.4	Remarks																				

4. Interpretation of CFP quantification results		
4.1	Interpretation of CFP quantification results	<p>CO2 emission in use and maintenance stage is the largest as 80%. It is important to save energy during product usage.</p> <p>The use condition in this scenario can be different from the use condition of the user.</p> <p>A choice of the use condition (print mode, print conditions and so on) can reduce the CO2 emission during product usage.</p> <p>For example, 2,500kg-CO2e of the CO2 emissions (approximately 20%) can be reduced if 2-in-1 print is applied to 50% of the estimated total print volume.</p> <p>Primary data is used in the raw material consumption. Secondary data is used in the parts manufacturing process which might not be reflected our own circumstances because it is difficult to collect the data for thousands of the parts. Please understand this result as the rough estimate according to the reason mentioned above.</p>

5. Conditions of quantification					
5.1	Name of approved CFP-PCR	Imaging input and/or output equipment	5.2	Approved CFP-PCR ID	PA-DG-02
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data (domestic country v.1.04, foreign country v.1.0) is used if the items don't correspond to basic data v.1.01.			

6. Verification information					
6.1	Verification method	CFP system certification	6.2	CFP system certification No.	SCN16001
6.3	Verification ID	FX-2020-003	6.4	Completion date of verification	February 7th, 2020

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	http://www.cfp-japan.jp/
7.3	Program operator	Sustainable ManagementPromotion Organization(SuMPO)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	Revised on April 1st, 2021: Implemented the company name change.
---	---------	--

For secondary data, please refer to the information on the following CFP website.
<http://www.cfp-japan.jp/calculate/verify/data.html>