
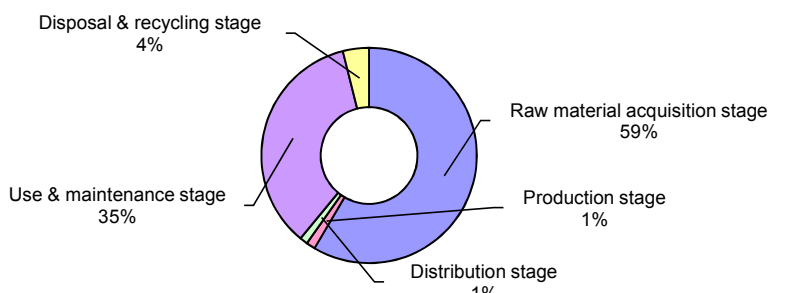


Registration Information Carbon Footprint of Products (CFP)



1. Product information			
1.1	Registration number	CR-DG02-17082	1.7 Product photo 
1.2	Registration name	DocuCentre-VI C3370 (For Taiwan)	
1.3	Model name / number	DocuCentre-VI C3370	
1.4	Main specifications of product	Print speed (Color/Mono): 30ppm/30ppm (Letter) Maximum Paper size: SRA3(320x450mm) Capable of print/copy/scan/fax, duplex printing. Product Size: 640(W)x685(D)x1128(H) (mm) Product weight: 133kg	
1.5	CFP quantification unit	Per unit product	
1.6	CFP release date	December 27th, 2017	

2. Company Information		
2.1	Company name (in English)	Fuji Xerox Co., Ltd.
2.2	Phone number (incl. area code)	+81-3-6271-5111

3. CFP quantification results, and description of CFP declaration			
3.1	CFP quantification results	1,500	kg-CO ₂ e
3.2	Breakdown (by life cycle stage, by process, by flow, etc.)		
	Raw material acquisition stage	850	kg-CO ₂ e
	Production stage	20	kg-CO ₂ e
	Distribution stage	17	kg-CO ₂ e
	Use & maintenance stage	510	kg-CO ₂ e
	Disposal & recycling stage	57	kg-CO ₂ e
3.3	Value in CFP mark and description of additional info.		
	Value in CFP mark	<Numerical value> 1,500kg	<Unit for the value> per unit product
	Description of additional info.	<p>*Calculated by the standard Scenario for MFP (EP type). *CO₂ emission in the distribution stage assumes Taiwan as the main sales area. *Electric power in the use and maintenance stage is evaluated with the public electric-power-consumption-rate in Taiwan. *Print volume is assumed 540,000 sheets. *In this scenario, the CO₂ emissions from copy papers are estimated 4,200 kg-CO₂e at 4.0g per A4 paper. *The CO₂ emission of printing paper is excluded from the use and maintenance stage.</p> <div style="text-align: center;">  <p>Disposal & recycling stage 4%</p> <p>Raw material acquisition stage 59%</p> <p>Production stage 1%</p> <p>Distribution stage 1%</p> <p>Use & maintenance stage 35%</p> </div>	
3.4	Remarks		

4. Interpretation of CFP quantification results		
4.1	Interpretation of CFP quantification results	<p>CO2 emission in raw material acquisition stage is the largest as 59%. It is important to reduce size and weight.</p> <p>CO2 emission in use and maintenance stage is the second largest as 35%. It is important to save energy during product usage.</p> <p>The use condition in this scenario can be different from the use condition of the user. A choice of the use condition (print mode, print conditions and so on) can reduce the CO₂ emission during product usage. For example, 130kg-CO₂e of the CO₂ emissions (approximately 8.8%) can be reduced if 2-in-1 print is applied to 50% of the estimated total print volume.</p> <p>Primary data is used in the raw material consumption. Secondary data is used in the parts manufacturing process which might not be reflected our own circumstances because it is difficult to collect the data for thousands of the parts. Please understand this result as the rough estimate according to the reason mentioned above.</p>

5. Conditions of quantification					
5.1	Name of approved CFP-PCR	Imaging input and/or output equipment	5.2	Approved CFP-PCR ID	PA-DG-02
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data (country v.1.04, foreign country v.1.01) is used if the items don't correspond to basic data v.1.01.			

6. Verification information					
6.1	Verification method	Product-by-product	6.2	CFP system certification No.	—
6.3	Verification ID	CV-DG02-17082	6.4	Completion date of verification	December 21st, 2017

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	http://www.cfp-japan.jp/
7.3	Program operator	Japan Environmental Management Association for Industry (JEMA)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	—
---	---------	---

For secondary data, please refer to the information on the following CFP website.
<http://www.cfp-japan.jp/calculate/verify/data.html>