
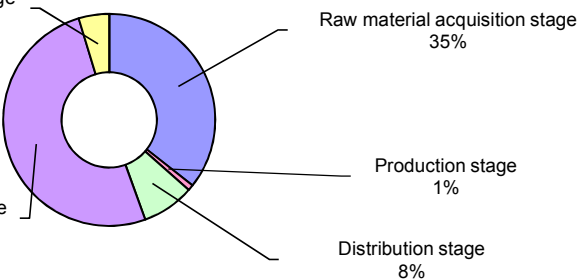


# Registration Information Carbon Footprint of Products (CFP)



1. Product information			
1.1	Registration number	CR-DG02-17060	1.7 Product photo  
1.2	Registration name	Xerox VersaLink C7025 Color Multifunction Printer (3TM)	
1.3	Model name / number	Xerox VersaLink C7025 Color Multifunction Printer (3TM)	
1.4	Main specifications of product	Print speed (Color/Mono): 25ppm/25ppm (A4) Maximum Paper size: A3(297×420mm) Capable of print/copy/scan/fax, duplex printing, WiFi, NFC. Product Size: 615.7(W)x670.8(D)x1118.6(H) (mm) Product weight: 93kg	
1.5	CFP quantification unit	Per unit product	
1.6	CFP release date	June 9th, 2017	

2. Company Information		
2.1	Company name (in English)	Fuji Xerox Co., Ltd.
2.2	Phone number (incl. area code)	+81-3-6271-5111

3. CFP quantification results, and description of CFP declaration																							
3.1	CFP quantification results	1,400	kg-CO <sub>2</sub> e																				
3.2	Breakdown (by life cycle stage, by process, by flow, etc.)																						
	Raw material acquisition stage	490	kg-CO <sub>2</sub> e																				
	Production stage	12	kg-CO <sub>2</sub> e																				
	Distribution stage	110	kg-CO <sub>2</sub> e																				
	Use & maintenance stage	700	kg-CO <sub>2</sub> e																				
	Disposal & recycling stage	64	kg-CO <sub>2</sub> e																				
3.3	Value in CFP mark and description of additional info.																						
	Value in CFP mark	<Numerical value> <b>1,400kg</b>	<Unit for the value> per unit product																				
	Description of additional info.	<p>*Calculated by the standard Scenario for MFP (EP type).            *CO<sub>2</sub> emission in the distribution stage assumes the United States as the main sales area.            *Electric power in the use and maintenance stage is evaluated with the public electric-power-consumption-rate in the United States.            *Print volume is assumed 375,000 sheets.            *In this scenario, the CO<sub>2</sub> emissions from copy papers are estimated 2,900 kg-CO<sub>2</sub>e at 4.0g per A4 paper.            *The CO<sub>2</sub> emission of printing paper is excluded from the use and maintenance stage.</p> <div style="text-align: center;">  <table border="1" style="margin: 10px auto;"> <caption>CFP Breakdown by Life Cycle Stage</caption> <thead> <tr> <th>Life Cycle Stage</th> <th>CO<sub>2</sub>e (kg)</th> <th>Percentage</th> </tr> </thead> <tbody> <tr> <td>Raw material acquisition stage</td> <td>490</td> <td>35%</td> </tr> <tr> <td>Use &amp; maintenance stage</td> <td>700</td> <td>51%</td> </tr> <tr> <td>Distribution stage</td> <td>110</td> <td>8%</td> </tr> <tr> <td>Disposal &amp; recycling stage</td> <td>64</td> <td>5%</td> </tr> <tr> <td>Production stage</td> <td>12</td> <td>1%</td> </tr> <tr> <td><b>Total</b></td> <td><b>1,400</b></td> <td><b>100%</b></td> </tr> </tbody> </table> </div>		Life Cycle Stage	CO <sub>2</sub> e (kg)	Percentage	Raw material acquisition stage	490	35%	Use & maintenance stage	700	51%	Distribution stage	110	8%	Disposal & recycling stage	64	5%	Production stage	12	1%	<b>Total</b>	<b>1,400</b>
Life Cycle Stage	CO <sub>2</sub> e (kg)	Percentage																					
Raw material acquisition stage	490	35%																					
Use & maintenance stage	700	51%																					
Distribution stage	110	8%																					
Disposal & recycling stage	64	5%																					
Production stage	12	1%																					
<b>Total</b>	<b>1,400</b>	<b>100%</b>																					
3.4	Remarks																						

4. Interpretation of CFP quantification results		
4.1	Interpretation of CFP quantification results	<p>CO2 emission in use and maintenance stage is the largest as 51%. It is important to save energy during product usage.</p> <p>The use condition in this scenario can be different from the use condition of the user. A choice of the use condition (print mode, print conditions and so on) can reduce the CO2 emission during product usage. For example, 175kg-CO2e of the CO2 emissions (approximately 13%) can be reduced if 2-in-1 print is applied to 187,500sheets (50% of print volume).</p> <p>Primary data is used in the raw material consumption. Secondary data is used in the parts manufacturing process which might not be reflected our own circumstances because it is difficult to collect the data for thousands of the parts. Please understand this result as the rough estimate according to the reason mentioned above.</p>

5. Conditions of quantification					
5.1	Name of approved CFP-PCR	Imaging input and/or output equipment	5.2	Approved CFP-PCR ID	PA-DG-02
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data (country v.1.04, foreign country v.1.01) is used if the items don't correspond to basic data v.1.01.			

6. Verification information					
6.1	Verification method	Product-by-product	6.2	CFP system certification No.	—
6.3	Verification ID	CV-DG02-17060	6.4	Completion date of verification	June 2nd, 2017

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	<a href="http://www.cfp-japan.jp/">http://www.cfp-japan.jp/</a>
7.3	Program operator	Japan Environmental Management Association for Industry (JEMAI)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	—
---	---------	---

For secondary data, please refer to the information on the following CFP website.  
<http://www.cfp-japan.jp/calculate/verify/data.html>