
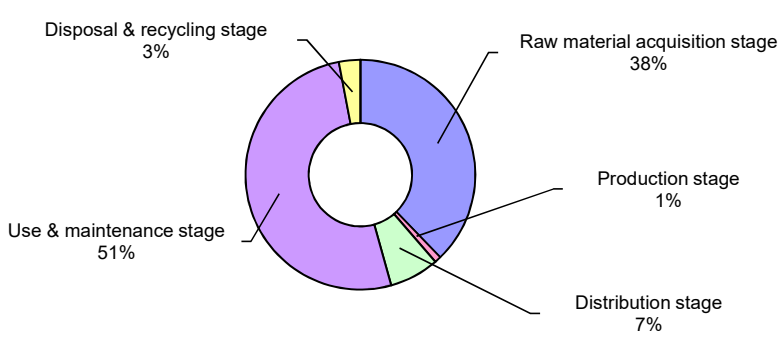


Registration Information Carbon Footprint of Products (CFP)



1. Product information			
1.1	Registration number	CR-DG02-17039-A	1.7 Product photo 
1.2	Registration name	Xerox AltaLink C8035 3TM	
1.3	Model name / number	Xerox AltaLink C8035 3TM	
1.4	Main specifications of product	Print speed (Color/Mono): 35ppm/35ppm Maximum Paper size: SRA3(320x450mm) Capable of print/copy/scan/fax, duplex printing. Product Size: 640(.7W)x732.8(D)x1142(H) (mm) Product weight: 135kg	
1.5	CFP quantification unit	Per unit product	
1.6	CFP release date	May 8th, 2017	

2. Company Information		
2.1	Company name (in English)	FUJIFILM Business Innovation Corp.
2.2	Phone number (incl. area code)	+81-3-6271-5111

3. CFP quantification results, and description of CFP declaration			
3.1	CFP quantification results	2,200	kg-CO ₂ e
3.2	Breakdown (by life cycle stage, by process, by flow, etc.)		
	Raw material acquisition stage	810	kg-CO ₂ e
	Production stage	20	kg-CO ₂ e
	Distribution stage	150	kg-CO ₂ e
	Use & maintenance stage	1,100	kg-CO ₂ e
	Disposal & recycling stage	65	kg-CO ₂ e
Value in CFP mark and description of additional info.			
	Value in CFP mark	<Numerical value>	<Unit for the value>
		2,200kg	per unit product
3.3	Description of additional info.	<p>*Calculated by the standard Scenario for MFP (EP type). *CO₂ emission in the distribution stage assumes the United States as the main sales area. *Electric power in the use and maintenance stage is evaluated with the public electric-power-consumption-rate in the United States. *Print volume is assumed 735,000 sheets. *In this scenario, the CO₂ emissions from copy papers are estimated 5,700 kg-CO₂e at 4.0g per A4 paper. *The CO₂ emission of printing paper is excluded from the use and maintenance stage.</p> <div style="text-align: center;">  <p>Disposal & recycling stage 3%</p> <p>Raw material acquisition stage 38%</p> <p>Production stage 1%</p> <p>Use & maintenance stage 51%</p> <p>Distribution stage 7%</p> </div>	
3.4	Remarks		

4. Interpretation of CFP quantification results		
4.1	Interpretation of CFP quantification results	<p>CO₂ emission in use and maintenance stage is the largest as 51%. It is important to save energy during product usage.</p> <p>The use condition in this scenario can be different from the use condition of the user.</p> <p>A choice of the use condition (print mode, print conditions and so on) can reduce the CO₂ emission during product usage.</p> <p>For example, 280kg-CO₂e of the CO₂ emissions (approximately 13%) can be reduced if 2-in-1 print is applied to 50% of the estimated total print volume.</p> <p>Primary data is used in the raw material consumption. Secondary data is used in the parts manufacturing process which might not be reflected our own circumstances because it is difficult to collect the data for thousands of the parts. Please understand this result as the rough estimate according to the reason mentioned above.</p>

5. Conditions of quantification					
5.1	Name of approved CFP-PCR	Imaging input and/or output equipment	5.2	Approved CFP-PCR ID	PA-DG-02
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data (country v.1.04, foreign country v.1.01) is used if the items don't correspond to basic data v.1.01.			

6. Verification information					
6.1	Verification method	Product-by-product	6.2	CFP system certification No.	—
6.3	Verification ID	CV-DG02-17039	6.4	Completion date of verification	April 28th, 2017

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	http://www.cfp-japan.jp/
7.3	Program operator	Japan Environmental Management Association for Industry (JEMA)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	Revised on April 1st, 2021: Implemented the company name change.
---	---------	--

For secondary data, please refer to the information on the following CFP website.
<http://www.cfp-japan.jp/calculate/verify/data.html>